

Mood Lighting Installation Instructions

Step 1 Start at the end of the track that is opposite your support structure (furthest away from your house or power source).



Fig. A

Step 2 Begin installation with the end of the light cord that has a plastic cap (Fig. A). Place the edge of the cap firmly against the outside edge, and the end of the track. Firmly push the lights into the bottom channel of the track. (Fig. B) Work your way inch by inch along the track to the other end. (Note: when you reach the end where the extender is held in place the cord will have a slight "hump" that protrudes from the track. This is normal and will not interfere with the operation of the track.) Repeat this step for each track.

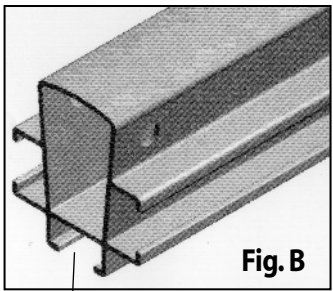


Fig. B

Cord lights snap into middle bottom channel of track

Step 3 Plug one cord into the end of each light (Fig. C). Starting with the outside track (furthest from your power source) extend the cord over to the next adjacent track. Cut cord from second track approximately 6" long and splice together your 1st cord with the second cord and with the excess cord from the second track as in the figure at right, which will be used to connect to track #3, or transformer whichever is appropriate (Fig. D). Adjoin all tracks in this manner



Fig. C

Step 4 Connect your last remaining cord to your transformer as shown at right (Fig. E). Do not have transformer plugged in at this time!

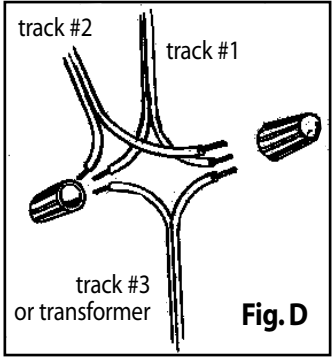


Fig. D

Step 5 Make sure your transformer is secured in a safe location.



Fig. E

Step 6 Plug in your transformer and enjoy your ShadeTree Mood Lighting!

If the length of your track needs to be adjusted, then you may need to adjust the length of your light cords. If so, follow these steps. (Note: light cords are cut a few inches longer than your track. This is normal and will not require additional cutting.)

If cutting light cords, cut from the compression fitting end. (Fig. C from previous page)

If the length of your track needs to be adjusted, then you may need to adjust the length of your light cords. If so, follow these steps. (Note: light cords are cut a few inches longer than your track. This is normal and will not require additional cutting.)

If cutting light cords, cut from the compression fitting end. (Fig. C from previous page)